


## SMD 905nm 1x4 Pulsed Laser Diode Array

# High Power Laser-Diode Family for LiDAR and Range Finding

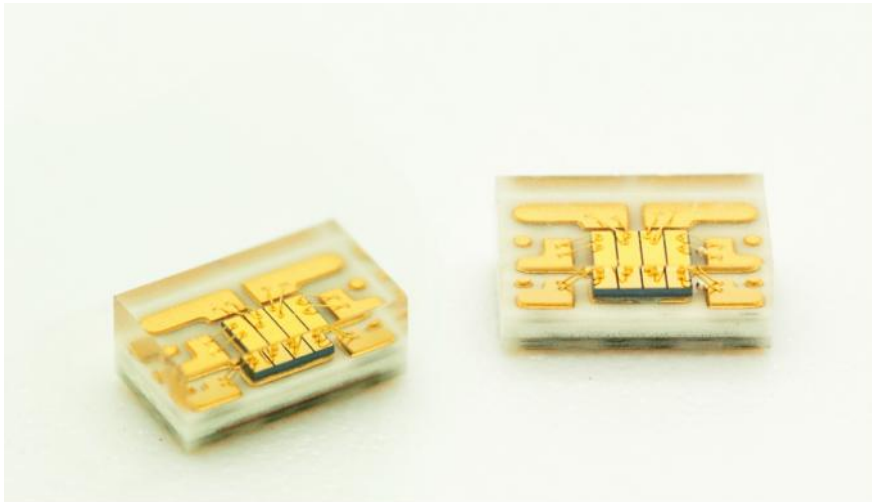

Near field profile, each channel

### Key Features

- Concentrated emitting source size for high power into aperture
- Multi-Epi Quantum well structure
- Two versions available – one where the channels are close together to allow the lasers to be operated as one large laser with virtually no gaps between channels in the near field, the other where each channel is individually addressable
- The addressable version can be operated as one large laser but there will be spaces between the channels
- Can sustain large reverse voltage levels of up to 35V for 1 $\mu$ s
- Excellent power stability with temperature
- RoHS compliant

*Excelitas' pulsed semiconductor laser array produces very high peak optical pulses centered at a wavelength of 905 nm.*

Excelitas Technologies' pulsed semiconductor laser array module is a monolithic array of 4 individual 905nm InGaAs/GaAs strained quantum well lasers which can be driven individually in the -4A version, where each channel is individually addressable with no electronic or optical crosstalk within the array, or with a common drive for the -4C version, where the output from the channels will combine to appear as one large laser when fired together. Each laser is a structure of three single cavities grown on a GaAs substrate and connected in series by a low resistance connector, which is a tunnel junction. Each laser has current injection width  $W = 235$  or  $270\mu\text{m}$ , depending on version, and height  $H = 10\mu\text{m}$

The laser diode is mounted on a leadless laminate carrier (LLC) substrate with excellent thermal management. This is intended for both surface mount applications and hybrid integration. The encapsulate material is a molded epoxy resin for high-volume manufacturing.

The package design and assembly processing techniques are such that the die positioning is well controlled to the reference surfaces. With all 4 channels being part of the same monolithic chip growth, positioning and alignment channel-to-channel are controlled by the mask design and lithographic processes, and are thus accurate to micron-level tolerances.

Quantum well laser design offers rise and fall times of  $<1$  ns however the drive circuit layout and package inductance play a dominant role and should be designed accordingly.

### Applications

- LiDAR
- Adaptive cruise control
- Autonomous Vehicles
- Range finding
- Safety light curtains
- Laser therapy

**EXCELITAS**<sup>®</sup>  
TECHNOLOGIES

# Surface Mount 905 nm Pulsed Semiconductor Laser 4-channel Array

## High Power Laser-Diode Family for LiDAR and Range Finding

**Table 1: Maximum Ratings**

Parameter	Symbol	Minimum	Maximum	Units
Peak Reverse Voltage	$V_{RM}$		35	V
Pulse Duration	$t_w$	5	100	ns
Duty Factor	$du$		0.1	%
Storage Temperature	$T_s$	-40	105	°C
Operating Temperature	$T_{OP}$	-40	85	°C
Soldering for 5 Seconds			260	°C

**Table 2: General Electro-optical Specifications at 23°C**

Parameter	Symbol	Minimum	Typical	Maximum	Units
Centre Wavelength of Spectral Envelope	$\lambda_c$	895	905	915	nm
Spectral Bandwidth at 50% Intensity Points	$\Delta\lambda$		5		nm
Wavelength Temperature Coefficient	$\Delta T/\Delta\lambda$		0.25		nm/°C
Beam Spread (50% Intensity Points) Parallel to Junction Plane	$\theta_{  }$		10		degrees
Beam Spread (50% Intensity Points) Perpendicular to Junction Plane	$\theta_{\perp}$		25		degrees

**Table 3: Part Numbering**

Each channel individually addressable	TPGAD1S11A-4A
All channels fired together	TPGAD1S09A-4C

**Table 4: Electro-optical Specifications at 23°C**

Test Conditions: 50ns, 1 kHz

Characteristics (per channel)	Symbol	Minimum	Typical	Maximum	Units
Emitting Area -4A Individually addressable (each channel) -4C Common firing			270 x 10 230 x 10		$\mu\text{m}$
Pitch between emitting stripes – fast axis		4	4.7	5	$\mu\text{m}$
Pitch between adjacent lasers -4A -4C			315 260		$\mu\text{m}$
Drive Current	$I_{FM}$		30		A
Optical Power Output at $I_{FM}$	$P_O$	70	75		W
Forward Voltage at $i_{FM}^1$	$V_F$		13.5		V
Threshold Current	$I_{TH}$		1.75		A
Series Resistance	$R_s$		0.23		$\Omega$
Bandgap Voltage Drop	$V_g$		6.5		V

## Surface Mount 905 nm Pulsed Semiconductor Laser 4-channel Array

### High Power Laser-Diode Family for LiDAR and Range Finding

**Note 1:** As estimated by  $V_F = R_S i_F + V_g$ .

# Surface Mount 905 nm Pulsed Semiconductor Laser 4-channel Array

## High Power Laser-Diode Family for LiDAR and Range Finding

### Electro-Optical Characteristics

Figure 1:

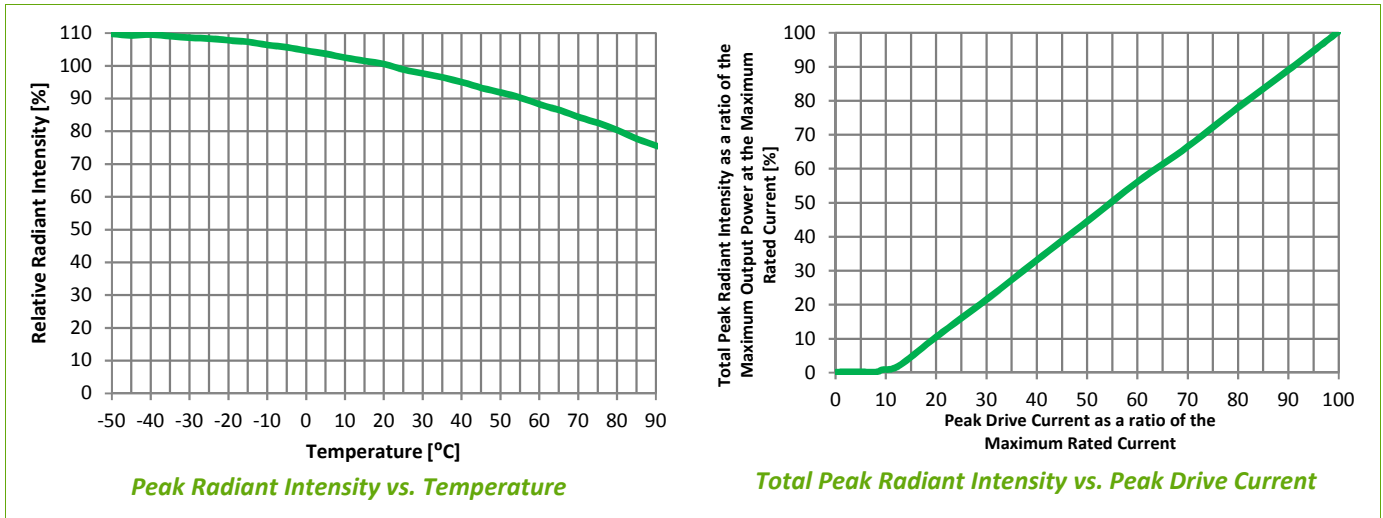


Figure 2:


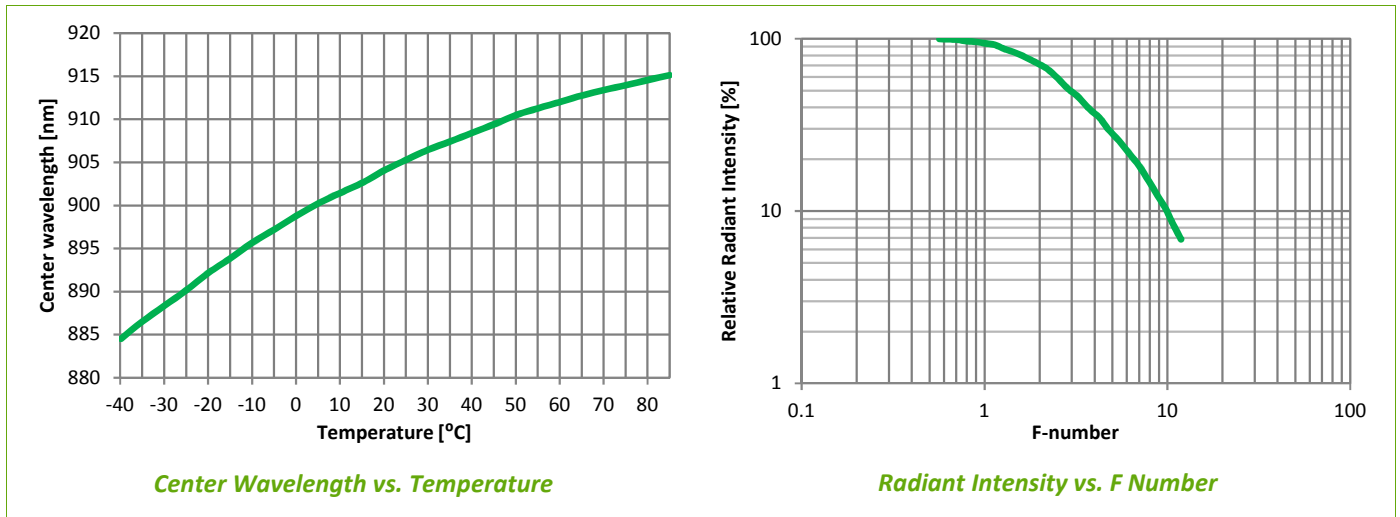


Figure 3:

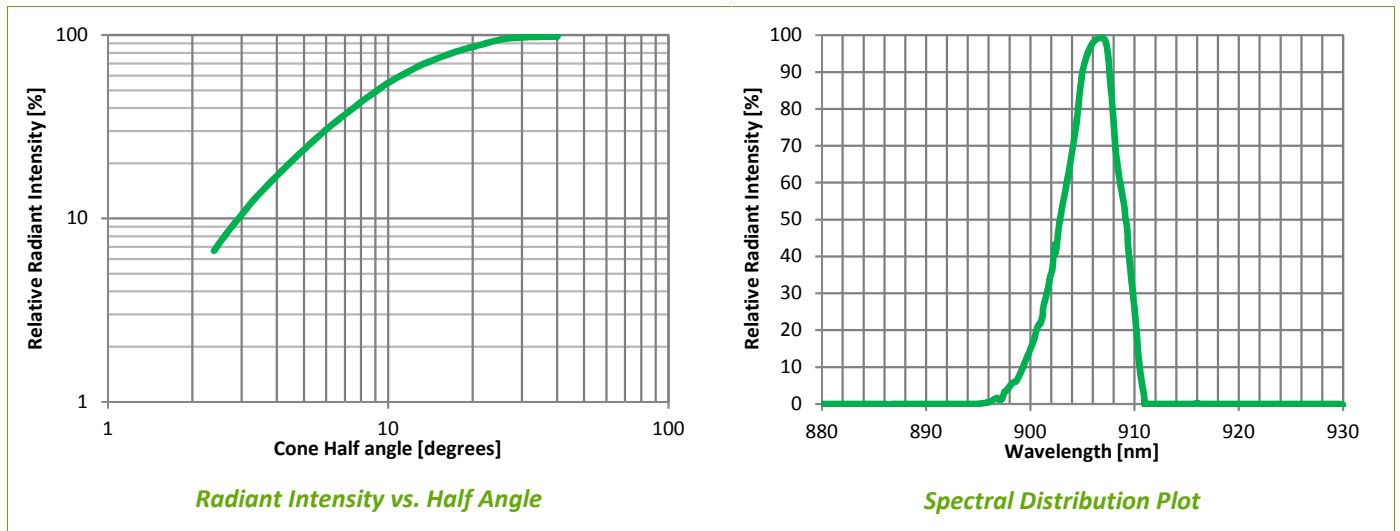

# Surface Mount 905 nm Pulsed Semiconductor Laser 4-channel Array

## High Power Laser-Diode Family for LiDAR and Range Finding

Figure 4:


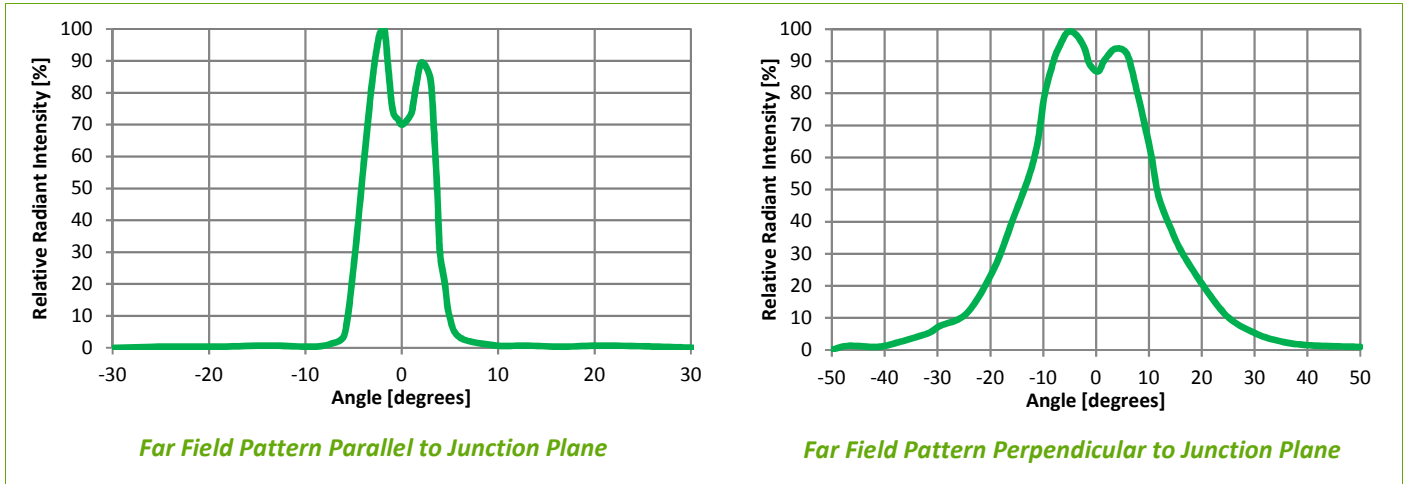



Figure 5: Package Mechanical Dimensions

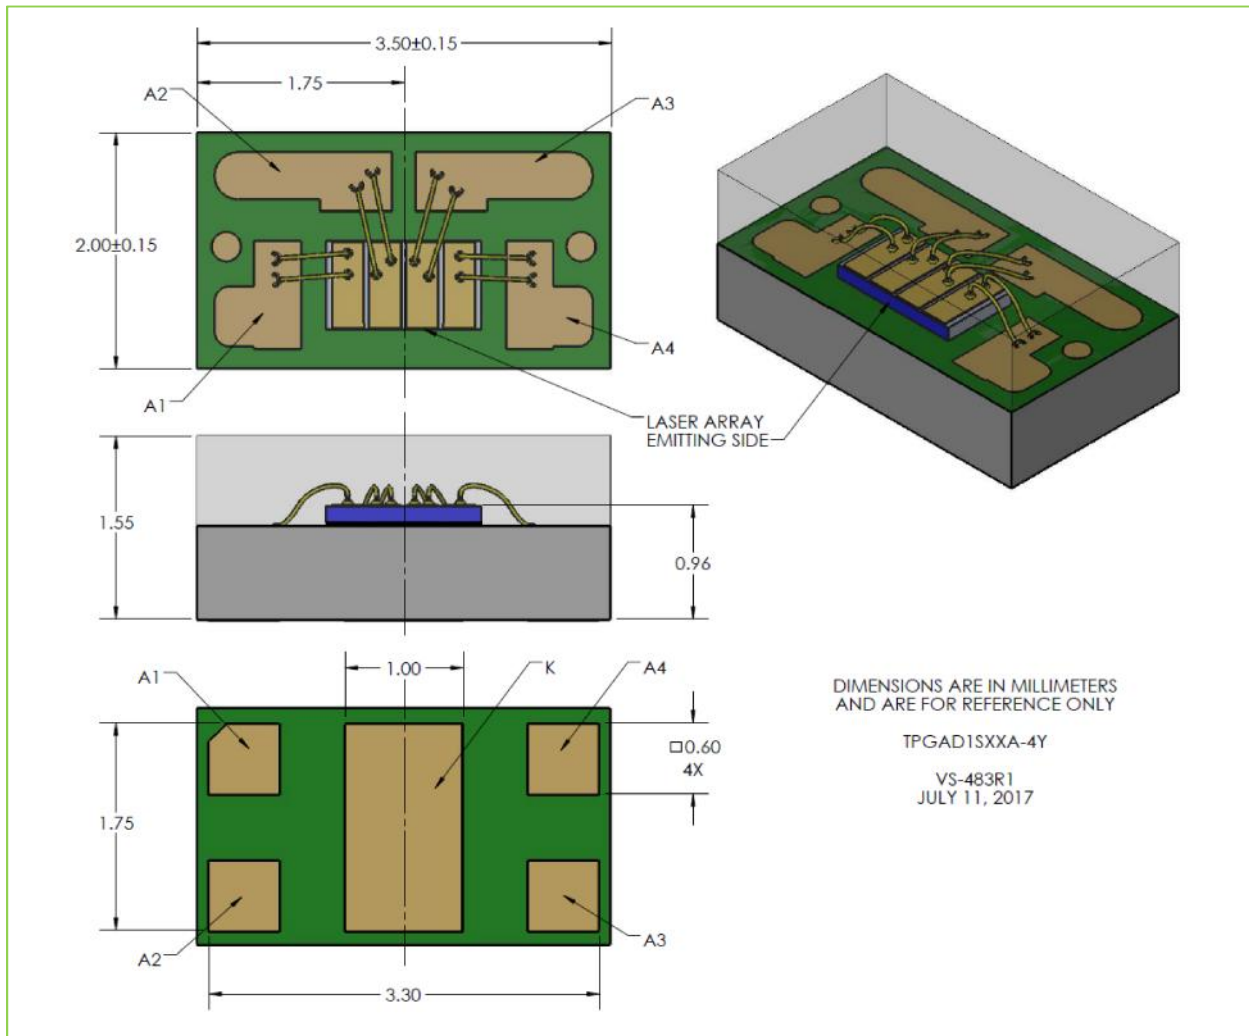

# Surface Mount 905 nm Pulsed Semiconductor Laser 4-channel Array

## High Power Laser-Diode Family for LiDAR and Range Finding


Figure 6: Laser Emitting Area Typical Dimensions

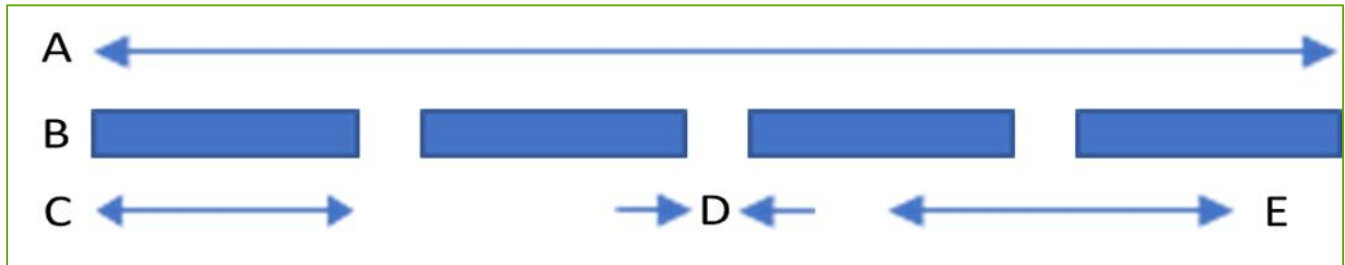

Characteristic	Label	-4A individually addressed	-4C common firing
Array length	A	1215	1010
Emitting height	B	10	10
Emitting width	C	280-290	240-250
Space between channels	D	25-35	10-20
Channel Pitch	E	315	260

All dimensions in  $\mu\text{m}$

Figure 7: Recommended typical solder reflow profile (specific reflow soldering parameters depend on solder alloy used).

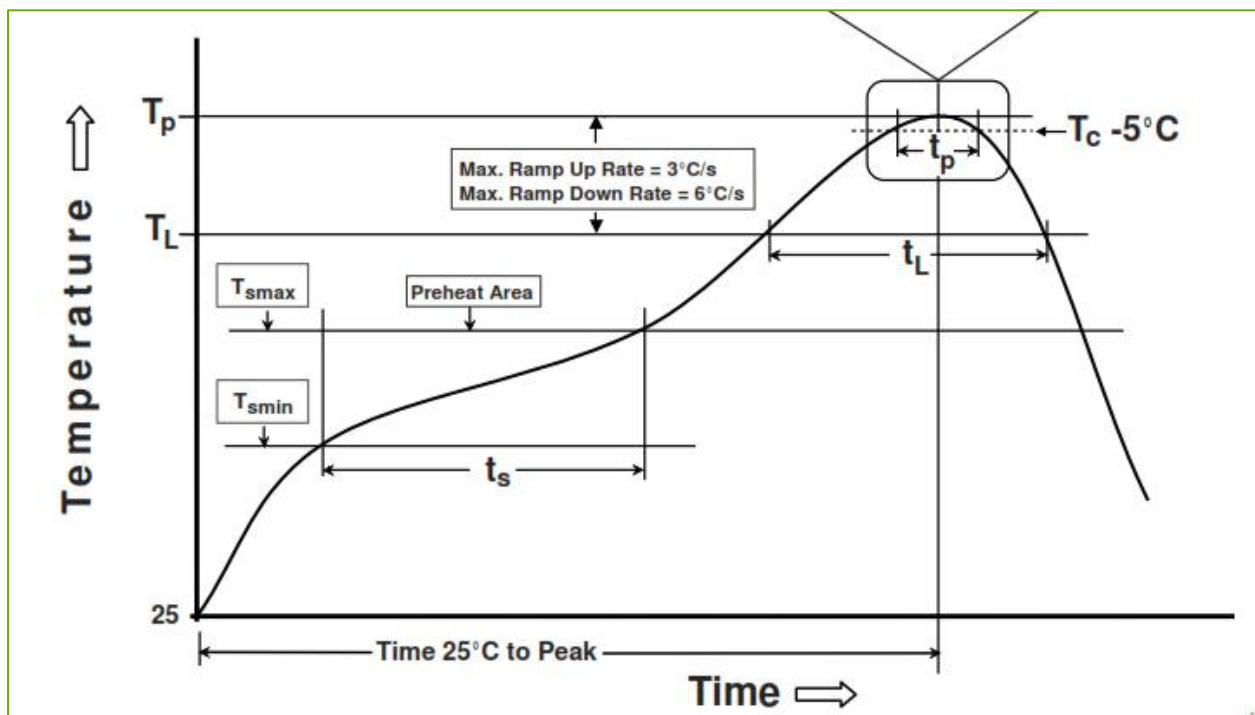

## Surface Mount 905 nm Pulsed Semiconductor Laser 4-channel Array

### High Power Laser-Diode Family for LiDAR and Range Finding

Profile Feature	Symbol	Value	Units
Pre-Heat			
Temperature min	$T_{S_{min}}$	150	°C
Temperature max	$T_{S_{max}}$	200	°C
Time ( $T_{S_{min}}$ to $T_{S_{max}}$ )	$t_s$	75	seconds
Temperature maintained above	$T_L$	217	°C
Time maintained above	$t_L$	65	seconds
Peak Temperature	$T_P$	244	°C
Time within 5°C of the actual peak temperature ( $T_P$ )		25	seconds
Ramp down rate		2	°C/second
Time 25°C to Peak Temperature		4	Minutes

#### MLS Rating

This series of laser diodes comply with a Moisture Sensitivity Level (MSL) rating of 3 as defined in IPC/JEDEC- J-STD-033C. This allows for up to 168 hour floor life at  $\leq 30^\circ\text{C}$  / 60%RH once removed from the sealed reel packaging. For complete details refer to the IPC/JEDEC- J-STD-033C specification.

#### For Your Safety: Laser Radiation

Under operation, these devices produce invisible electromagnetic radiation that may be harmful to the human eye. To ensure that these laser components meet the requirements of Class IIIb laser products, they must not be operated outside their maximum ratings. Power supplies used with these components must be such that the maximum peak forward current cannot be exceeded. It is the responsibility of the user incorporating a laser into a system to certify the Class of use and ensure that it meets the requirements of the ANSI or appropriate authority.

Further details may be obtained in the following publications:

**21CFR 1040.10** – “Performance Standards for Light Emitting Products (Laser Products)”

**ANSI Z136.1** – “American National Standard for Safe use of Lasers”

**IEC 60825-1** – “Safety of Laser Products”

#### RoHS Compliance

This series of laser diodes are designed and built to be fully compliant with the European Union Directive 2011/65/EU – Restriction of the use of certain Hazardous Substances in Electrical and Electronic equipment.



#### Warranty

# Surface Mount 905 nm Pulsed Semiconductor Laser 4-channel Array

## High Power Laser-Diode Family for LiDAR and Range Finding

A standard 12-month warranty following shipment applies.

### About Excelitas Technologies

Excelitas Technologies is a global technology leader focused on delivering innovative, customized solutions to meet the lighting, detection and other high-performance technology needs of OEM customers.

Excelitas has a long and rich history of serving our OEM customer base with optoelectronic sensors and modules for more than 45 years beginning with PerkinElmer, EG&G, and RCA. The constant throughout has been our innovation and commitment to delivering the highest quality solutions to our customers worldwide.

From aerospace and defense to analytical instrumentation, clinical diagnostics, medical, industrial, and safety and security applications, Excelitas Technologies is committed to enabling our customers' success in their specialty end-markets. Excelitas Technologies has approximately 5,000 employees in North America, Europe and Asia, serving customers across the world.

#### Excelitas Technologies

22001 Dumberry Road  
Vaudreuil-Dorion, Quebec  
Canada J7V 8P7  
Telephone: (+1) 450.424.3300  
Toll-free: (+1) 800.775.6786  
Fax: (+1) 450.424.3345  
[detection.na@excelitas.com](mailto:detection.na@excelitas.com)

#### Excelitas Technologies

**GmbH & Co. KG**  
Wenzel-Jaksch-Str. 31  
D-65199 Wiesbaden  
Germany  
Telephone: (+49) 611 492 430  
Fax: (+49) 611 492 165  
[detection.europe@excelitas.com](mailto:detection.europe@excelitas.com)

#### Excelitas Technologies Singapore, Pte. Ltd.

8 Tractor Road  
Singapore 627969  
Telephone: (+65) 6775 2022 (Main number)  
Telephone: (+65) 6770 4366 (Customer Service)  
Fax: (+65) 6778-1752  
[detection.asia@excelitas.com](mailto:detection.asia@excelitas.com)



For a complete listing of our global offices, visit [www.excelitas.com/locations](http://www.excelitas.com/locations)

© 2017 Excelitas Technologies Corp. All rights reserved. The Excelitas logo and design are registered trademarks of Excelitas Technologies Corp. All other trademarks not owned by Excelitas Technologies or its subsidiaries that are depicted herein are the property of their respective owners. Excelitas reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.