


GG 9902-1
Stroboscopic, Linear , 3000 Watt, Quartz

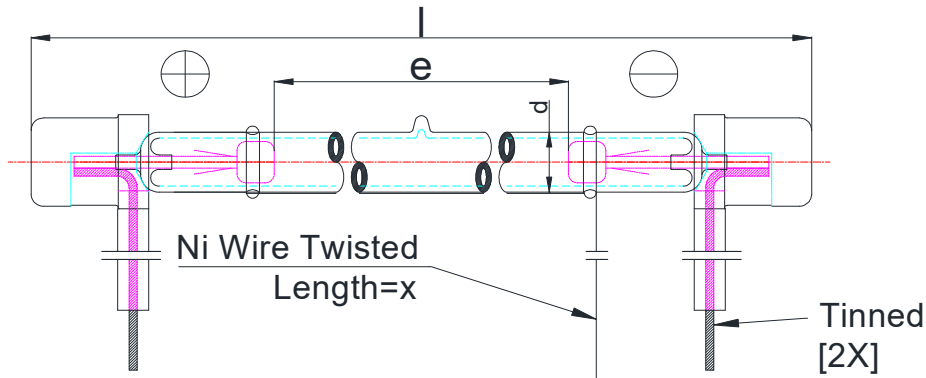

Dimensional Specifications (mm)

Arc Length (e)	Glass Body Length (g)	Overall Length (l)	Glass Diameter (d)	Radius (r)	Pin Distance (a)	Trigger length (x)
615	-	695	10 dia	-	-	100

Notes: 1) Envelope material: Q2. 2) lamps are Rohs compliant

Operating Specifications:

Max. Power Pmax/W	3000	Trigger coil TR	ZS 1031
Nom. Power Pnom / W		Trigger capacitor Cz/μF	0.47
Max. flashenergy Emax/Ws		Min. trigger voltage Uz min/V	300
Nom. flashenergy Enom/Ws		Trigger contact S	SCR
Max. anode voltage Uamax/V	1000	Flash frequency/Hz	2~14
Nom. anode voltage Uanom/V	800	Life/Number of flashes/N	500 hrs
Min. anode voltage Uamin/V	600	Repetition rate trep/ s	
Nom.flash capacitor CB/ μF		Sec trigger voltage Uz sec / KV	-ve
Light reduction after life/ %		Unloaded	

For a complete listing of our global offices, visit www.excelitas.com/locations

© 2021 Excelitas Technologies Corp. All rights reserved. The Excelitas logo and design are registered trademarks of Excelitas Technologies Corp. All other trademarks not owned by Excelitas Technologies or its subsidiaries that are depicted herein are the property of their respective owners. Excelitas reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.