


C34XMB

High Power Water Cooled Flash and Arc Lamps, Linear, Quartz

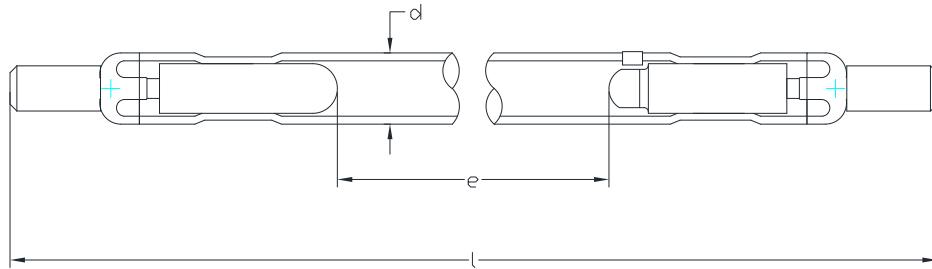

Dimensional Specifications (mm)

Arc Length (e)	Glass Body Length (g)	Overall Length (l)	Glass Diameter (d)	Radius (r)	Base length (a)	Base dia. (b)
75mm		170.9m	6mm dia.			

Notes: lamps are Rohs compliant

Operating Specifications:

Max. Power P_{max}/W	1500	Trigger coil TR	ZS 1031 (H)
Nom. Power P_{nom} / W		Trigger capacitor $C_z/\mu F$	0.47
Max. flashenergy E_{max}/Ws		Min. trigger voltage $U_z \text{ min}/V$	300
Nom. flashenergy E_{nom}/Ws		Trigger contact S	
Max. anode voltage U_{amax}/V		Flash frequency/Hz	
Nom. anode voltage U_{anom}/V	700	Life/Number of flashes/N	
Min. anode voltage U_{amin}/V		Repetition rate t_{rep}/ s	1
Nom. flash capacitor $C_B/ \mu F$		Sec trigger voltage $U_z \text{ sec} / KV$	
Light reduction after life/ %		Unloaded	

For a complete listing of our global offices, visit www.excelitas.com/locations

© 2021 Excelitas Technologies Corp. All rights reserved. The Excelitas logo and design are registered trademarks of Excelitas Technologies Corp. All other trademarks not owned by Excelitas Technologies or its subsidiaries that are depicted herein are the property of their respective owners. Excelitas reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.