


## EG 9902-1

### Solar Simulation, Linear, 1500 Watt, Quartz

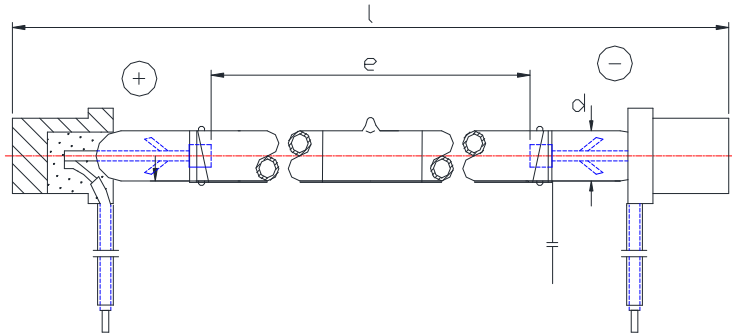

#### Dimensional Specifications (mm)

Arc Length (e)	Glass Body Length (g)	Overall Length (l)	Glass Diameter (d)	Radius (r)	Pin Distance (a)	Trigger length (x)
312	–	392	10 dia	–	–	–

Notes: 1) Envelope material: Q2. 2) lamps are Rohs compliant

#### Operating Specifications:

Max. Power $P_{max}/W$	1500	Trigger coil TR	ZS1052
Nom. Power $P_{nom} / W$		Trigger capacitor $C_z/\mu F$	0.22
Max. flashenergy $E_{max}/Ws$		Min. trigger voltage $U_z \text{ min}/V$	250
Nom. flashenergy $E_{nom}/Ws$		Trigger contact S	SCR
Max. anode voltage $U_{amax}/V$	480	Flash frequency/Hz	2 - 14
Nom. anode voltage $U_{anom}/V$	360	Life/Number of flashes/N	
Min. anode voltage $U_{amin}/V$	350	Repetition rate $t_{rep}/s$	
Nom. flash capacitor $C_B/\mu F$		Sec trigger voltage $U_z \text{ sec} / KV$	-ve
Light reduction after life/ %		Unloaded	

For a complete listing of our global offices, visit [www.excelitas.com/locations](http://www.excelitas.com/locations)

© 2021 Excelitas Technologies Corp. All rights reserved. The Excelitas logo and design are registered trademarks of Excelitas Technologies Corp. All other trademarks not owned by Excelitas Technologies or its subsidiaries that are depicted herein are the property of their respective owners. Excelitas reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.